



***LIGHTNINGGRIPPER®***

**WHAT A LIL'  
RIPPER!**

**STRONG, NARROW TINES THAT PENETRATE DEEP INTO  
SOIL, BREAKING HARD PANS TO ENHANCE ROOT GROWTH  
AND IMPROVE NUTRIENT AND MOISTURE ABSORPTION**



**ASK OUR EXPERTS**

**FIND  
OUT  
MORE**



**[www.k-line.net.au](http://www.k-line.net.au)**


**SAFETY NEVER HURTS!™**

Always read the Operators Manual before operating any equipment. Inspect equipment before using it and be sure it is operating properly. Follow the product safety signs and use any safety features provided. CNH Australia reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions, and illustrative material are as accurate as known at time of publication but are subject to change without notice. Availability of some models and equipment builds varies.

© Copyright 2025 CNH America LLC. All Rights Reserved. K-Line Ag and CNH Capital are registered trademarks of CNH America LLC. - We have updated our information notice about privacy ("Privacy Statement") to give you the latest information on how we collect and use your personal data. You can review our updated Privacy Statement by clicking the privacy link on the footer.



# ***LIGHTNINGGRIPPER®***

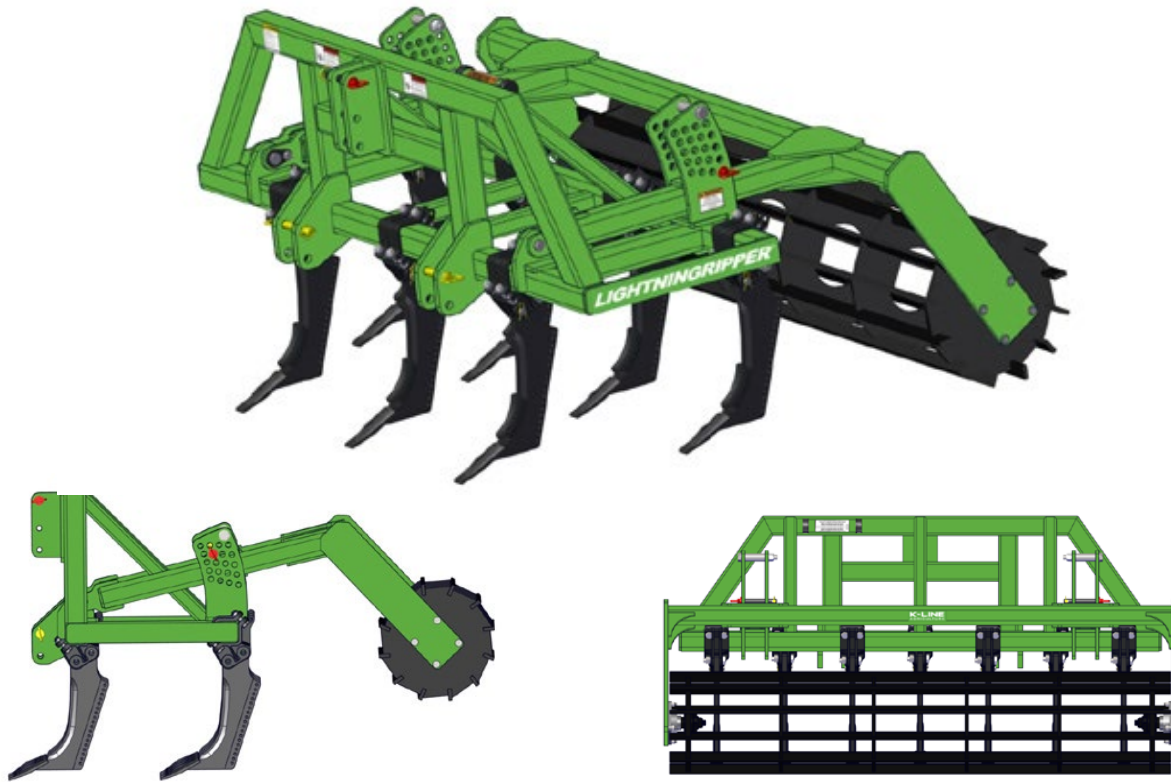

The K-Line Ag LightningRipper® is designed with narrow yet strong tines that reach deep into the soil, effectively breaking up hard pans to enhance root penetration and plant growth. This process allows for better nutrient and moisture entry, improving both retention and uptake by plants.

The LightningRipper® features heavy-duty, deep-ripping tines equipped with a shear pin system, ensuring durability and reliability. The tines themselves are narrow, with a 27mm tine shank, which helps minimise soil disturbance.

A roller serves as a depth gauge, ensuring that the rip line remains closed and consistent. The main frame is built from robust 100mm x 100mm x 9mm box steel, offering strength and longevity, while the 630mm underframe clearance ensures smooth operation over varying terrain.

## **Benefits**

- Bust hard pans & keep the moisture in
- Minimal soil & pasture disturbance
- Less horsepower requirements
- Rips to a depth of 450mm

## **LIGHTNINGGRIPPER® SPECIFICATIONS**

CODE	DESCRIPTION	NO. SHANKS / TINE SPACING	OPERATING WIDTH	HP
3125D	3PL Rigid 3PL Rigid	5 / 500mm 7 / 360mm	2.6m 2.5m	85-110 120-155
3130D	3PL Rigid 3PL Rigid 3PL Rigid	5 / 600mm 7 / 430mm 9 / 330mm	3.1m 3m 2.8m	85-110 120-155 155-200
3135D	3PL Rigid 3PL Rigid	7 / 500mm 11 / 320mm	3.5m 3.6m	120-155 190-240

